



LIME, LIFELONG EXCELLENCE

DÉCOLISS®

VENETIAN PLASTER



INTERIOR

VENETIAN PLASTER

THE + BENEFITS

- ◆ PRE-MIXED
- ◆ EASY TO USE
- ◆ VERY SOFT, LOW SHRINKAGE
- ◆ MAT TO GLOSSY EFFECT

DECOLISS® is an authentic pre-mixed Venetian lime plaster. It achieves a fine stucco finish, venetian, marmorino, stucco luccido...

SUITABLE FOR

Interiors :

- > Any mineral background, prepared, cleaned and absorbent.
- > To decorate living rooms, bathrooms, kitchens, bedrooms...

PACKAGING

10 kg powder bucket
33 buckets per pallet (330 kg pallet)

PRODUCT COMPOSITION

Saint-Astier® natural lime, additives, marble powder and talc. Possible pigment addition (on jobsite).

SHELF LIFE & GUARANTEE

12 months from production date if kept sealed in original container and stored in dry conditions. Manufacturer Civil Responsibility.



Air quality





SUITABLE BACKGROUNDS

> DECOLISS® can be applied on sound lime mortar, gypsum render. If the surface is too rough or not adapted (gypsum or cement board...), ECOMORTAR® R50 or R100 should be used to create a smooth level surface. Make a compatibility test in a small area before full application (especially for timber backgrounds).

BACKGROUND PREPARATION

The background should be cleaned and dust free.

- > The background must be firm and damp but not water saturated.
- > The background must be grained and dusted. Surface irregularities will be < 1 mm.

NON-SUITABLE BACKGROUNDS

> For internal use only. Not suitable for non-prepared backgrounds or painted substrates.

Nota : DECOLISS® is not suitable on a background subject to capillary rise.

DECOLISS® PREPARATION

- > 1kg of DECOLISS® + 600/800 ml (g) water. Use a powerful whisk for about 5 minutes adding water gradually to obtain a lump free, homogenous paste. Manual mixing will take longer.
- > To increase the mix dispersion, if possible, leave the mixed mortar for a few hours or until the following day to achieve an even greater workability.
- > Just before application, add the pigment* and mix again.

* The powder pigment should be mixed with water to get heavy-handing texture for a regular coloration.

DECOLISS® APPLICATION

- > Tools : trowel, stainless steel or plastic smoother or spatula, stucco trowel.
- > Spread several very thin coats (< 1 mm) fresh on fresh.
- > Smooth with the smoother or spatula as it dries. To make polishing easier and increase the shine of the stucco, spray diluted black soap on the support or on the smoother.
- > Once started, the surfaces must be completed within the day.
- > The plastic smoother helps limit gray marks from metal tools.
- > In exposed areas (kitchen, bathroom, etc.) or for a simple decorative effect, after uniform drying and carbonation of the decoliss (at least 7 days), water resistant coating can be applied such as natural wax, black soap, etc.

WORKING TEMPERATURE

Between 8°C and 30°C. During hot period, dampen the surfaces the day before application and keep the finished surfaces damp during 48 hours by a mist spraying.

HEALTH & SAFETY


Follow the instructions on the safety data sheet and wear the appropriate equipment (gloves, mask, safety shoes...).

CONSUMPTION

About 1.5 kg per mm of thickness per m².

Example of DÉCOLISS® with Saint-Astier® pigments :

1 bucket of 10 kg DÉCOLISS® + 1 litre of pigment.

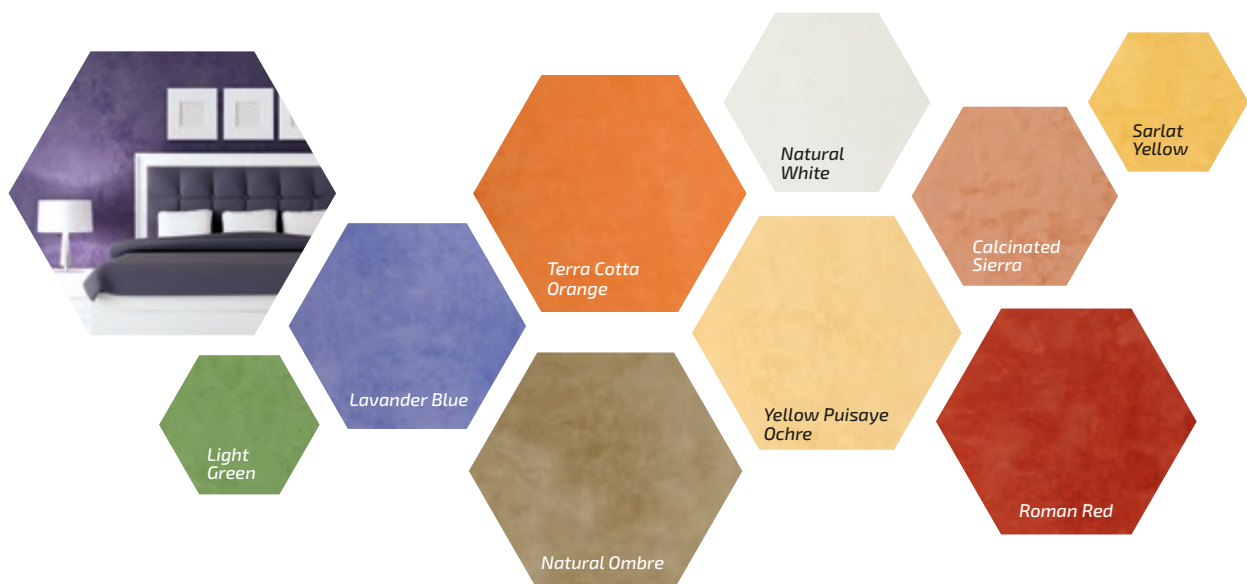

NB : The colour finishing proposed here is only an overview of the colour obtained. It does not reflect the appearance of the Venetian Plaster.